



Business 企业简介 introduction



东台市永升悦贸易有限公司位于江苏省东台市辖区。主要致力于潜水装备、安防设备、消防装备、救生设备和劳保用品的整体方案设计和销售。主要服务于船舶、铁路、石油、煤矿、电力、消防、救援领域。公司坚持以商贸为导向，以科技为动力、以信息为依托、以服务为保障的企业发展战略。先后在全国32个省、直辖市建立了销售和服务机构，做到为客户设计、施工、服务、维保等一条龙服务，业绩已经延伸到海外等多个国家和地区，使公司的销售、服务、品牌进一步提升。我们将一如既往，与时俱进，开拓创新，求实奋进。我们期待与您的合作，铸就一个更美好的灿烂辉煌的明天。

Dontai Younus Trading Co., Ltd. is located in Dongtai city of Jiangsu province. We focused on the overall program design and sales of diving equipment, security equipment, fire-fighting equipment, life saving equipment and labour protection appliance. Main services ships, railway, petroleum, coal, electricity, fire and rescue. Our company always guided by the market, constantly renew and develop new products.

We established sales and service agency in 32 provinces and cities around China to provide integrated services include design, construction, service, maintenance to our clients.

When face the customer, we always adhere to the tenets of perfect, suitable, efficient, guarantee and win-win; when face the competitor, we believe the truth that the competition leads to development.

We will continue as always, keep pace with the time, open up innovation continuously and process basing on practice. Your cooperation is expected for creating a more brilliant future.

目录 | CONTENTS

潜水装备 Diving Equipment

潜水服 Diving Suit
潜水气瓶 Breathing Tank
一级减压阀 1st Stage Regulator
二级减压阀 2nd Stage Regulator
瓶头阀 Cylinder Valve
潜水全面罩 Diving Full Mask Mask
潜水呼吸管 Diving Snorkel
潜水面镜 Diving Mask
潜水手套 Diving Gloves
潜水气压表 Diving Gauge
潜水浮力背心BCD
潜水手电筒 Diving Torch
浮潜背心 Snorkel Vest
脚蹼 Fins
铅块 Lead Weight
腰带 Belt
充气泵 Air Compressor

安防设备 Security Equipment

便携式洗眼器 Portable Eyewash Station
复合式洗眼器 Emergency Eyewash And Shower
防冻洗眼器 Antifreeze Eyewash
立式洗眼器 Vertical Eyewash
挂壁式洗眼器 Wall-Mounted Eyewash
台式洗眼器 Desktop Eyewash
防火防爆柜 Fire And Explosion Protection Cabinet
紧急冲淋房 Emergency Shower Room

劳保用品 Labour Protection Appliance

安全鞋 Safety Shoes
口罩 Mask
护目镜 Protective Goggles
头盔 Helmet
电焊手套 Welding Gloves
耳塞 Earplugs

消防装备 Firefighting Equipment

干粉灭火器 ABC Fire Extinguisher
二氧化碳灭火器 Carbon Dioxide Fire Extinguisher
泡沫灭火器 Foam Fire Extinguisher
自给正压式消防空气呼吸器
Self-Contained Positive Pressure Fire Air Breathing Apparatus
推车式长管呼吸器 Wheeled Breathing Apparatus with a long tube
电动送风呼吸器 Electric Air Respirator
消防隔热服 Electric Supply Respirator With A Long Tube
消防员装备 Fire Fighting Equipment
防护服 Chemical Protective Glass One Ensemble For Firefighters
消防卷盘 Fire Hose Reel
消火栓 Fire Hydrant
防毒面罩 Gas Mask
灭火器箱 Fire Extinguisher Cabinet
消防卷盘箱 Fire Hose Reel Cabinet

救生设备 Life-Saving Equipment

船用救生衣 Life Jacket
气胀式救生衣 Inflatable Life Jacket
工作救生衣 Working Life Jacket
浸水保温服 Immersion Suit
救生筏 Life Raft
救生圈 Life Buoy
铜锣 Brass Gong
雾钟 Fog Bell
救生缓降器 Descent Rescue Device




复合式紧急冲淋洗眼器

材 质: 316L/304不锈钢 (可选)
进 水 口 尺 寸: G1¼寸内螺纹
出 水 口 尺 寸: G1¼寸内螺纹
工 作 压 力: 0.2Mpa-0.4Mpa
使 用 介 质: 常温用水或符合卫生标准用水
冲淋喷头流量: 75L-180L/min (流量随水源压力不同而变化)
洗眼喷头流量: 7.5-18L/min, 洗眼喷头内置双层过滤网, 过滤水中杂质, 使水流成泡沫状水柱, 有效防止因水流过激而对眼部神经和受伤部位造成二次伤害, 喷头外设防尘盖, 使用时可随水流自动冲开。
适 用 场 所: 广泛用于核能、电站、制药、医疗、化工、石化、电子、冶金、冶炼、印刷、印染、教育及科研单位等
提 示: 产品适用于0度以上地区使用, 在0度或0度以下地区要注意管道保温防冻 (有防冻功能除外)。
可加踏板, 手脚联动, 更加方便快捷
可加排空防冻功能 (适合环境温度低于零度地区使用)
可加夜光标识, 夜间更好引导受伤者
可加照明装置, 夜间使用更加方便

combined eye washer



Material: whole 304/316L stainless steel (Optional), stainless steel + ABS corrosionproof coating (optional), special coating can effectively resist the strong acid, alkali, salt, oil, and a variety of chemical corrosion.
Water inlet size: G1¼inch thread
Water outlet size: G1¼ inch thread
Working pressure: 0.2Mpa-0.4Mpa
Media: normal temperature water or standard water, shower nozzle flow: 75L-180L/min (water flow varies with the water pressure)
The eye wash nozzle flow: 7.5-18L/min Spray head built-in double filters, filter impurities in water, the water is foamy water column effectively, it can protect from secondary damaging, dust cover is outside of nozzle, it will open automatically as per the water flow.
notice: The product is suitable for areas 0 degrees above, please pay attention to prevent freeze at areas 0 degree or blow.
Can add pedal, hands and feet linkage, more convenient emptying anti-freeze function is optional (suitable for the areas 0 degree blow) can add photoluminescent marks to guide the injured person
can add light device, more convenient to use at night

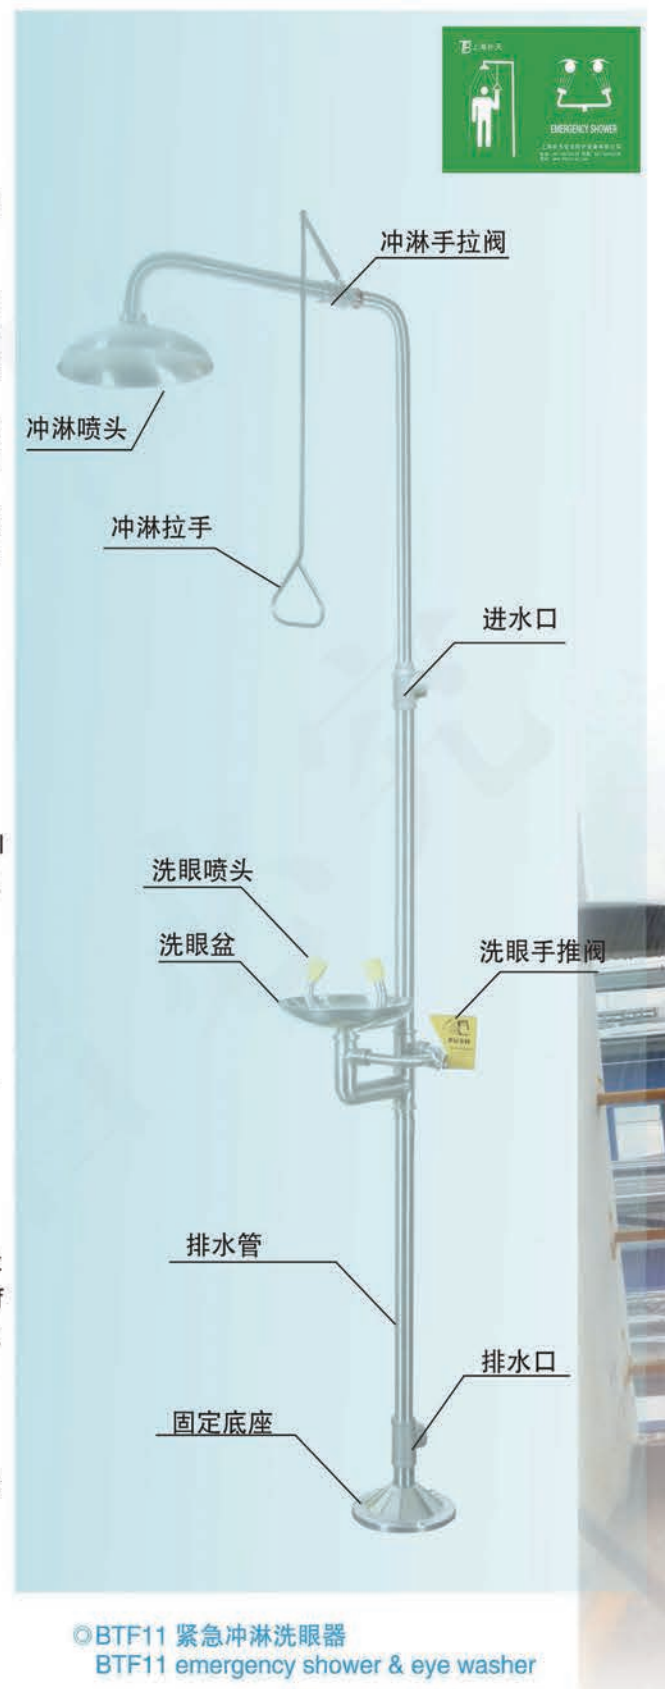

◎BTF11 紧急冲淋洗眼器
BTF11 emergency shower & eye washer



◎BTF41 紧急冲淋洗眼器 (手动排空防冻型)
BTF41 emergency shower & eye washer
(manual empty & anti-freeze)

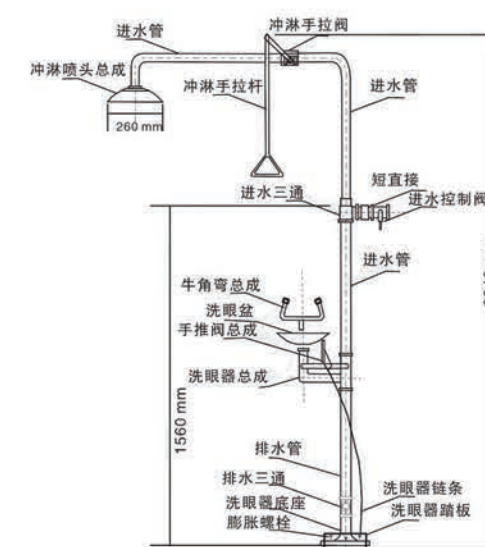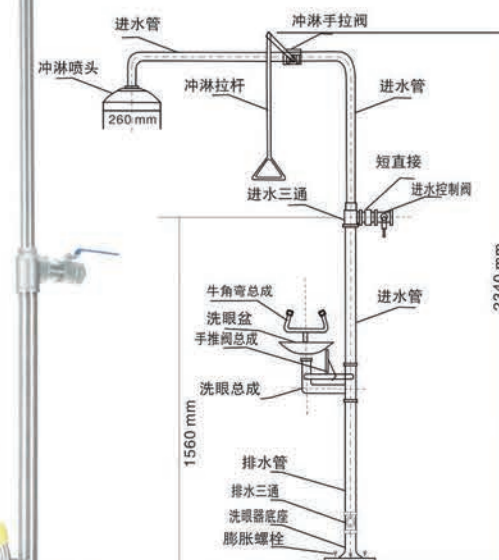

◎BTF61 紧急冲淋洗眼器 (手动排空防冻+脚踏板)
BTF61 emergency shower & eye washer (manual empty & anti-freeze+pedal)





东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

◎BTF61-A 304+手动排空+踏板+ABS防腐涂层
BTF61-A stainless steel+manual empty
+pedan+ABS corrosionproof coating

◎BTF41-A紧急冲淋洗眼器304+手动排空防冻型
+ABS防腐涂层(可选碳钢)
BTF41-A emergency shower&eye washer
304+manual empty & anti-freeze+ABS
corrosionproof coating(carbon steel is
optional)



◎BTF13 紧急冲淋洗眼器(大翻盖)
BTF13 emergency shower & eye washer
(large dust cover)



自动排空紧急冲淋防冻洗眼器

材 质: 316L/304不锈钢(可选)、可加+ABS防腐
涂层可选, 特殊涂层能有效抵抗强酸、
碱、盐、油等多种化学物质的腐蚀。

进 水 口 尺 寸: G1¼寸内螺纹

出 水 口 尺 寸: G1寸外螺纹


工 作 压 力: 0.2Mpa-0.4Mpa

使 用 介 质: 常温用水或符合卫生标准用水

冲淋喷头流量: 75L-180L/min (流量随水源压力不同而变
化)

洗眼喷头流量: 7.5-18L/min, 洗眼喷头内置双层过滤网,
过滤水中杂质, 使水流成泡沫状水柱, 有
效防止因水流过激而对眼部神经和受伤部
位造成二次伤害, 喷头外设防尘盖, 使用时
可随水流自动冲开。

特 点: 本产品适合环境温度低于零度的地区使用,
无需人工手动操作, 踩下踏板自动出水。
洗眼喷头和冲淋喷头可单独操作, 可根据
需要选择使用洗眼器和冲淋器。使用完以
后不需任何操作, 系统自动关闭水源并排
空系统内部积水, 从而起到防冻效果, 性价
比极高。

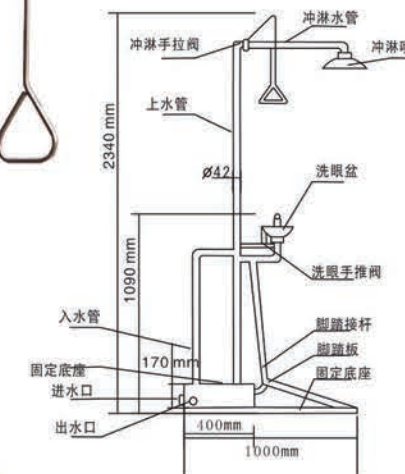

◎BTF81 自动排空紧急冲淋防冻
洗眼器
BTF81 Automatic emptying
emergency shower
anti-freeze eye washer



Automatic emptying emergency shower & eye washer

Material: whole 304 stainless steel (Optional),
stainless steel + ABS anti-corrosion coating(optional),
special coating can effectively resist the strong acid,
alkali, salt, oil, and a variety of chemical corrosion.

Water inlet size: G1¼inch thread

Water port size: G1-inch outside thread

Working pressure: 0.2Mpa-0.4Mpa

Media: normal temperature water or standard water,
shower nozzle flow: 75L-180L/min (water flow varies
with the water pressure)

The eyewash nozzle flow: 7.5-18L/min Spray head
built-in double filters, filter impurities in water, so the
water is foamy water column effectively to prevent
water excesses from causing secondary damage to
eye and injured parts ,the nozzle has dust cover
outside , dust cover can be opened automatically as
per the water flow.

Features: This product is suitable for areas 0 degree
below, (it's widely used in the northeast or sinkiang),
no manual operation, water go down automatically by
controlling pedal. The eyewash nozzle and shower
head can be operated separately , can be selected
using the eyewash or shower. After using, no any
operation, the system automatically turn off the water
and empty water inside pipe to prevent to freeze, very
convenient.

DONGTAI YOUNUS TRADING CO.,LTD.



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

复合式电伴热紧急冲淋洗眼器

电伴热复合式冲淋洗眼器专为北方寒冷天气地区设计，在标准复合式洗眼器的基础上增加了保温、报警、防爆、照明等诸多功能，大大提高洗眼器的实用性和安全性。

进水口尺寸：G1¼寸内螺纹

出水口尺寸：G1¼寸内螺纹

工作压力：0.2Mpa-0.4Mpa

使用介质：常温用水或符合标准卫生用水

冲淋喷头流量：75L-180L/min（流量随水源压力不同而变化）

洗眼喷头流量：7.5-18L/min，洗眼喷头内置双层过滤网，过滤水中杂质，使水流成泡沫状水柱，有效防止因水流过激而对眼部神经和受伤部位造成二次伤害，喷头外设防尘盖，使用时可随水流自动冲开。

保温系统：当进水温度低于零度时洗眼器系统自动开启加热功能，有效解决系统因温度过低结冰而导致洗眼器无法使用而造成严重后果。

报警系统：当有伤者使用洗眼器时系统会自动触发声光报警系统，发出警报或者通知中央控制室（选配）。不仅可以告知其他人此处有人在操作，同时也能达到请求救援的目的，能够使伤者得到及时有效的救治。

防爆系统：可根据客户需要配备不同等级的防爆系统。防爆等级ExdIIBT4/BT6/CT4/CT6等可选，防护等级有IP53/56/65等可选另外可选配照明装置，夜光标识、脚踏板等

combined Electric Heat Tracing emergency shower & eye washer

Electric heat combined is designed specially for cold weather in the north, on the basis of the standard composite of eyewash increased insulation, alarm, explosion-proof, lighting and many other features, greatly improve practicality and safety.

Water inlet size: G1¼ inch thread

Water outlet size: G1¼ inch thread

Working pressure: 0.2Mpa-0.4Mpa

Media: room temperature water or stander water

The the shower nozzle flow: 75L-180L/min ((water flow varies with the water pressure)

The eyewash nozzle flow: 7.5-18L/min Spray head built-in double filters, filter impurities in water to make the water flow into the foamy water column, effectively prevent secondary damage to the eye and injured parts, nozzle is with dust cover outsize, which can be opened automatically as per water flow.

Insulation system: when the inlet water temperature is 0 degree below, eye washer system automatically turns on the heating function, effectively solve the problem, which eye washer can't work because of too low



◎BTF83 电伴热紧急冲淋洗眼器

temperature

Alarm system: when injured person use it, system will automatically trigger audible and visual alarm system to alert or notify the central control room (optional). not only inform other people it was using, but also to achieve the purpose of the request for relief, ensure that the injured get timely and effective treatment.

Explosion-proof system: according to customer needs with different levels of explosion-proof system. such as: Exd IIBT4/BT6/CT4/CT6 etc (optional), protection levers have IP53/56/65 etc

In addition, can add lighting apparatus, luminous logo, pedals etc.



◎BTLC11 落地式紧急冲淋器
BTLC11 Vertical emergency shower



◎BTGC11-A 挂壁式紧急冲淋器
BTGC11-A Wall-mounted emergency shower

挂壁式紧急冲淋器

材质：316L/304不锈钢(可选)、不锈钢+ABS防腐涂层可选，特殊涂层能有效抵抗强酸、碱、盐、油等多种化学物质的腐蚀。

进水口尺寸：G1寸内螺纹

工作压力：0.2Mpa-0.4Mpa

使用介质：常温用水或符合卫生标准用水

冲淋喷头流量：75L-180L/min（流量随水源压力不同而变化）

适用场所：广泛用于核能、电站、制药、医疗、化工、石化、电子、冶金、冶炼、印刷、印染、教育及科研单位等

提示：产品适用于0度以上地区使用，在0度或0度以下地区要注意管道保温防冻

Wall-mounted emergency shower

Material: whole 304/316L stainless steel (Optional), stainless steel + ABS anti-corrosion coating (optional) special coating can effectively resist the strong acid, alkali, salt, oil, and a variety of chemical corrosion.

Water inlet size: G1 thread

Working pressure: 0.2Mpa-0.4Mpa

Media: room temperature water or meet health standards water

The the shower nozzle flow: 75L-180L/min (water flow varies with the water pressure)

Application areas: Widely used in nuclear energy, power plants, pharmaceutical, medical, chemical, petrochemical, electronics, metallurgy, smelting, printing, dyeing, education and scientific research units etc

Tip: apply to areas 0 degrees above, if 0 degrees or 0 degrees below, please ensure that the pipe don't freeze.

DONGTAI YOUNUS TRADING CO.,LTD.



BTF84电加热复合式洗眼器

电加热复合式冲淋洗眼器专为北方寒冷天气地区设计，在标准复合式洗眼器的基础上增加了加热、报警、防爆、照明等诸多功能，大大提高洗眼器的实用性和安全性。

进水口尺寸：G1¼寸内螺纹

出水口尺寸：G1¼寸内螺纹

工作压力：0.2Mpa-0.4Mpa

使用介质：常温用水或符合标准用水

冲淋喷头流量：75L-180L/min（流量随水源压力不同而变化）

洗眼喷头流量：7.5-18L/min，洗眼喷头内置双层过滤网，过滤水中杂质，使水流成泡沫状水柱，有效防止因水流过激而对眼部神经和受伤部位造成二次伤害。喷头外设防尘盖，使用时可随水流自动冲开。

加热系统：当打开洗眼器开关按钮时，电加热器自动加热，能有效提高洗眼器出水温度15度，注：加热系统对冲淋喷头出水温度只能提高1度左右。

报警系统：当有伤者使用洗眼器时系统会自动触发声光报警系统，发出警报或者通知中央控制室（选配）。不仅可以告知其他人此处有人在操作，同时也能达到请求救援的目的，能够使伤者得到及时有效的救治。

防爆系统：可根据客户需要配备不同等级的防爆系统。防爆等级分别有ExdIIBT4/BT6/CT4/CT6等可选，防护等级有IP53/56/65等可选另外可选配照明装置，夜光标识、脚踏板等！

BTF84 combined electric heating eye washer

combined electric heating eye washer is designed for using in the north, on the basis of the standard combined eye washer, add heating, alarm, explosion-proof, lighting etc functions, greatly improve the eyewash practicality and security.

Water inlet size: G1¼ inch thread

Water outlet size: G1¼ inch thread

Working pressure: 0.2Mpa-0.4Mpa

Media: normal temperature water or stander water

The shower nozzle flow: 75L-180L/min (water flow varies with the water pressure)

The eye wash nozzle flow: 7.5-18L/min, Spray head built-in double filter, filter impurities in water, make the water flow into the foamy water column, effectively prevent the secondary damage to eye and injured parts, the nozzle is with dust cover outside, dust cover can be opened automatically as per the water flow.


Heating system: When turn on switch for eye, electric heater automatically heat, can effectively improve the water temperature by 15 degrees (Note: heating system only raise about 1 degree for shower water temperature)

Alarm system: when the injured use it, system will automatically trigger audible and visual alarm system to alert or notify the central control room (optional). not only inform other people it's using, but also achieve the purpose of the request for relief, ensure that the injured get timely and effective treatment.

Explosion-proof system: according to customer needs with different levels of explosion-proof system. such as: Exd IIBT4/BT6/CT4/CT6 etc (optional), protection levers have IP53/56/65 etc



◎BTF84 复合式电加热洗眼器
BTF84 combined electrical heating eye washer

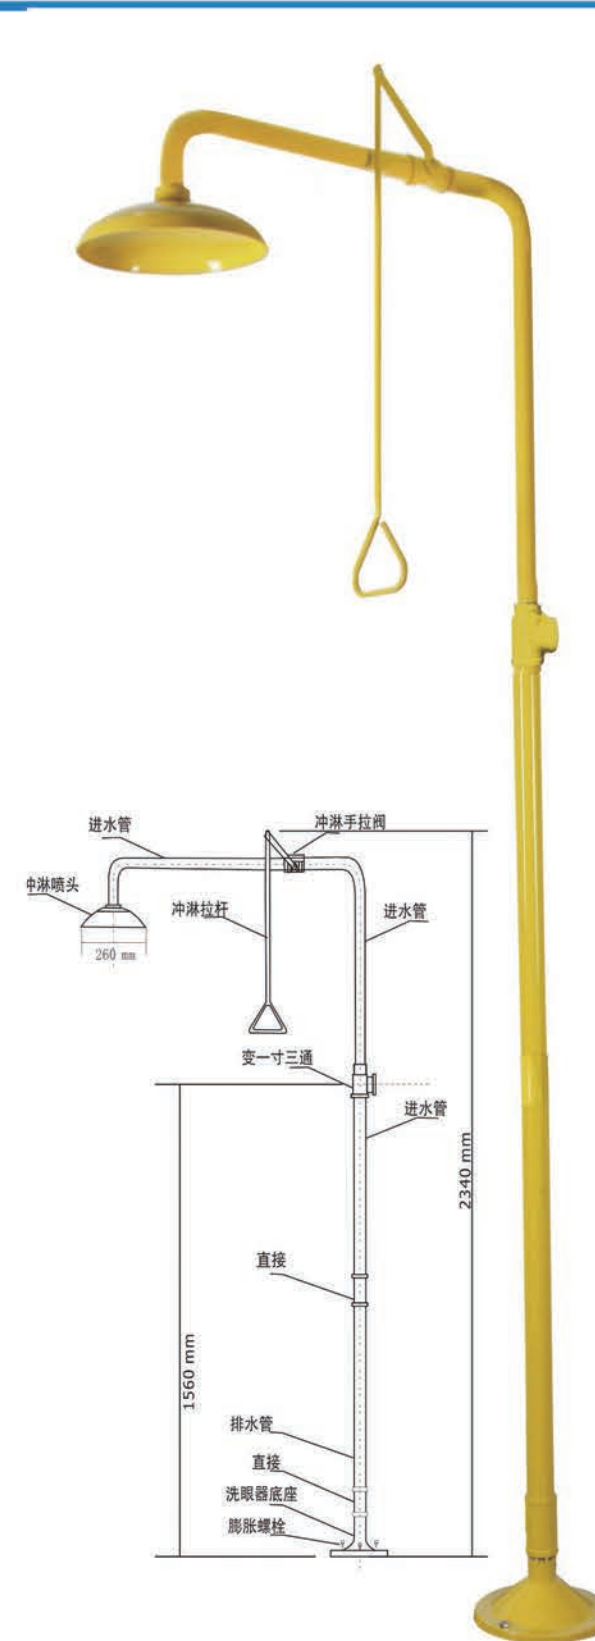

◎BTLC11-A 落地式紧急冲淋器
BTLC11-A Vertical emergency shower



◎BTGC11 挂壁式紧急冲淋器
BTGC11 Wall-mounted emergency shower

落地式紧急冲淋器

材质：316L/304不锈钢（可选）、不锈钢+ABS防腐涂层可选，特殊涂层能有效抵抗强酸、碱、盐、油等多种化学物质的腐蚀。

进水口尺寸：G1¼寸内螺纹

工作压力：0.2Mpa-0.4Mpa

使用介质：常温用水或符合卫生标准用水

冲淋喷头流量：75L-180L/min（流量随水源压力不同而变化）

适用场所：广泛用于核能、电站、制药、医疗、化工、石化、电子、冶金、冶炼，印刷、印染、教育及科研单位等

提示：产品适用于0度以上地区使用，在0度或0度以下地区要注意管道保温防冻

Floor-standing emergency shower

Material: whole 304/316L stainless steel (Optional), stainless steel + ABS anti-corrosion coating (optional) special coating can effectively resist the strong acid, alkali, salt, oil, and a variety of chemical corrosion.

Water inlet size: G1¼inch thread

Working pressure: 0.2Mpa-0.4Mpa

Media: normal temperature water or meet health standards water

The the shower nozzle flow: 75L-180L/min (water flow varies with the water pressure)

Application areas: Widely used in nuclear energy, power plants, pharmaceutical, medical, chemical, petrochemical, electronics, metallurgy, smelting, printing, dyeing, education and scientific research units etc

Tip: apply to areas 0 degrees above, if 0 degrees or 0 egrees below areas ,please ensure that the piped don't freeze



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

立式紧急洗眼器

材 质：304/316L不锈钢（可选）、可加ABS防腐涂层可选，特殊涂层能有效抵抗强酸、碱、盐、油等多种化学物质的腐蚀。

进 水 口 尺 寸：G $\frac{1}{2}$ 内螺纹

出 水 口 尺 寸：G1 $\frac{1}{4}$ 内螺纹

工 作 压 力：常温用水或符合卫生标准用水。

洗眼喷头流量：7.5-18L/min，洗眼喷头内置双层过滤网，过滤水中杂质使水流成泡沫状水柱，有效防止因水流过激而对眼部神经和受伤部位造成二次伤害，喷头外设防尘盖，使用时可随水流自动冲开

提 示：产品适用于0度以上地区使用，在0度或0度以下地区要注意管道保温防冻。

Vertical emergency eye washer

Material: overall 304/316L stainless steel (Optional), stainless steel + ABS anti-corrosion coating optional special coating can effectively resist the strong acid, alkali, salt, oil, and a variety of chemical corrosion.

Water inlet size: G $\frac{1}{2}$ inch thread

Water outlet size: G1 $\frac{1}{4}$ inch thread

Working pressure: 0.2Mpa-0.4Mpa


Media: normal temperature water or health standard water

The eyewash nozzle flow: 7.5-18L/min Spray head built-in double-layer filters, filter impurities in water to make the water flow into the foamy water column, effectively prevent secondary damage to the eye and injured parts. the nozzle is with dust cover outside, dust cover can be opened automatically as per the water flow.

caution: The product is suitable to use 0 degree above, please make sure it's not freeze if 0 degrees or 0 degrees blow (Except the ones with antifreeze function)




◎BTL11-A 立式紧急防腐洗眼器
BTL11-A Vertical emergency anti-corrosion eye washer

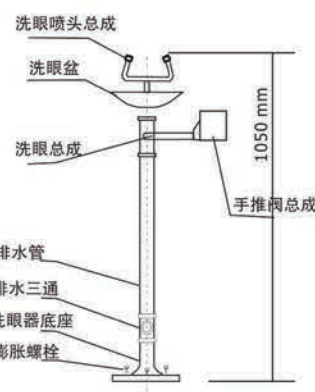

◎BTL11 立式紧急洗眼器
BTL11 Vertical emergency eye washer



◎BTL61-A 立式紧急洗眼器 304+ABS防腐涂层（可选碳钢）
BTL61-A Vertical emergency eye washer 304 +ABS corrosionproof coating (carbon steel is optional)

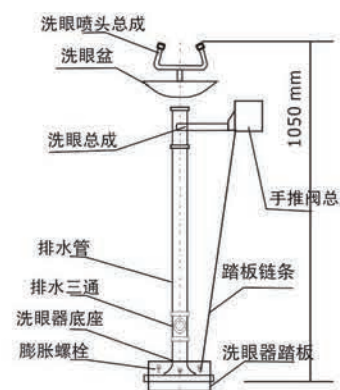

◎BTL81 立式自动排空防冻洗眼器
BTL81 Vertical automatic emptying anti-freeze eye washer




◎BTL61 立式紧急洗眼器 (手动排空防冻+踏板)
BTL61 Vertical emergency eye washer (manual emptying anti-freeze + pedal)

DONGTAI YOUNUS TRADING CO.,LTD.




◎BTL12 立式紧急洗眼器(不锈钢防尘大翻盖)
BTL12 Vertical emergency eye washer
(stainless steel and large dust cover)

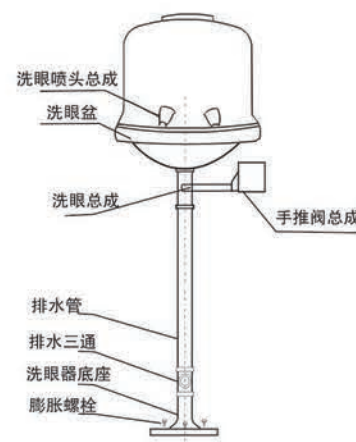


◎BTL13 立式紧急洗眼器(ABS防尘大翻盖)
BTL13 Vertical emergency eye washer
(ABS and large dust cover)




◎BTL21 立式紧急洗眼器(脚踏板)
BTL21 vertical emergency eye washer (pedal)

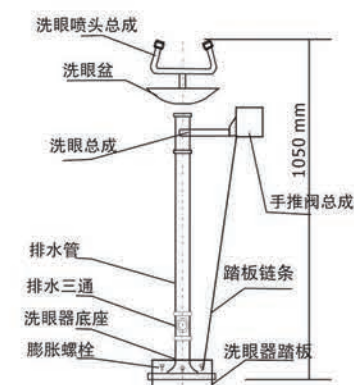

◎BTL21-A 立式紧急洗眼器 304+ABS 防腐涂层(可选碳钢)
BTL21-A Vertical emergency eye washer 304+ABS
corrosionproof coating (carbon steel is optional)

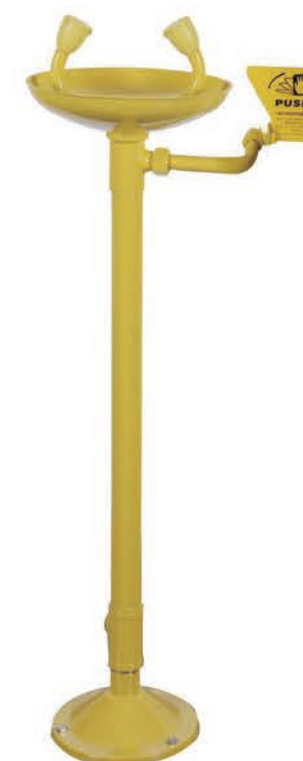

◎BTL41-A 立式手动排空防冻洗眼器
BTL41-A Vertical manual emptying anti-
freeze eye washer

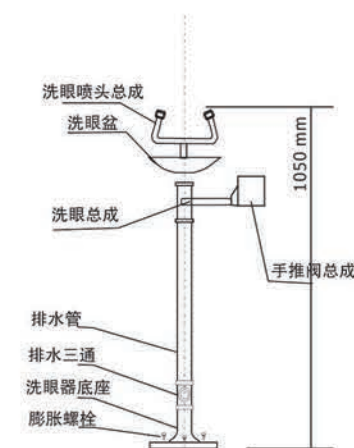

◎BTL41 立式防冻洗眼器(手动排空防冻)
BTL41 vertical emergency eye washer
(manual emptying anti-freeze)





东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

材质: 316L/304不锈钢、不锈钢+ABS防腐涂层 (可选)

工作压力: 0.20Mpa-0.40Mpa

进水口尺寸: G½英寸内螺纹,

出水口尺寸: G1英寸外螺纹,

洗眼喷头流量: > 12L/min

本产品适用于室内或者天气温度高于0度的地区使用,

适用场所: 广泛用于核能、电站、制药、医疗、化工、石化、电子、冶金、冶炼, 印刷、印染、教育及科研单位等

Material: 304/316L stainless steel 、stainless steel + ABS anti-corrosion coating (Optional)

Working pressure :0.2Mpa-0.4Mpa

Inlet size: G½ "internal thread

Outlet size: G1-inch external thread


Spray head water flow:> 12L/min

This product is suitable for indoor & outdoor(regarding outdoor,temperature should be 0 degree above)

Application areas: Widely used in nuclear energy, power plants, pharmaceutical, medical, chemical, petrochemical, electronics, metallurgy, smelting, printing, dyeing, education and scientific research units etc.



◎BTG11-A 双防不锈钢挂壁式紧急洗眼器 (ABS防腐涂层)
BTG11-A Double protection stainless steel emergency eye wash(ABS anti-corrosion coating)

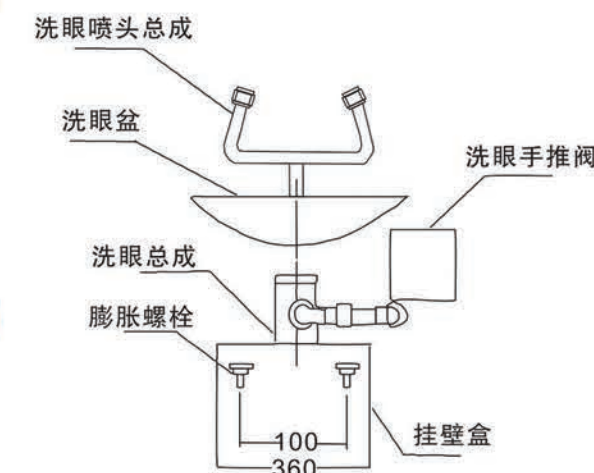

◎BTG11 不锈钢挂壁式紧急洗眼器
BTG11 Emergency eye washer



◎BTG15 挂壁式紧急洗眼器
BTG15 Wall-mounted emergency eye washer



◎BTG13 经济型挂壁式洗眼器
BTG13 Cost&effocoemt wall-mounted eye washer



◎BTG41 挂壁式紧急洗眼器(手动排空防冻)
BTG41 Wall-mounted emergency eye washer (Manual emptying & antifreeze)

DONGTAI YOUNUS TRADING CO.,LTD.



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT



◎BTBX16A 不锈钢大容量冲淋洗眼器

手推车便携式紧急冲淋洗眼器

型号: BTBX16A

功能: 洗眼+冲淋

材质: 304不锈钢

容量: 80L大容量的储水箱, 可提供连续15分钟以上不间断的洗眼或者冲淋时间

连接气源, 不需人工加压, 打开洗眼器开关, 直接使用。

配备小推车, 能快速移动到达事发地点, 有效对伤者受伤部位进行清洗。

The trolleys portable eye washer (suitable for areas without waterhead)

Model: BTBX16A

Function: wash eye + shower

Material: 304 stainless steel

volume: 80L a large storage tank, offer more than 15 minutes uninterrupted washing. Connected to the gas source, don't need manual pressure, open switch to use directly.

With small cart, quickly move to the location of the accident, can effectively clean for the injured.

手推车便携式紧急冲肤洗眼器 (适合无水源地使用)

型号: BTBX15

材质: 优质无毒ABS塑料

容量: 12L/16L可选可提供连续15分钟以上不间断的洗眼时间

配备小推车, 能快速移动到达事发地点, 有效对伤者受伤部位进行清洗

The barrow portable emergency eye washer (suitable for areas without waterhead)

Model: BTBX15

Material: high-quality non-toxic ABS plastic
volume: 12L/16L(optional) offer more than 15 minutes uninterrupted washing.

With small carts, quickly move to the location of the accident, can effectively clean for the injured.



◎BTBX15



◎BTBX15A

手推车紧急冲肤洗眼器 (适合无水源地使用)

型号: BTBX11

材质: 优质无毒ABS塑料

容量: 14加仑/53L可提供连续15分钟以上不间断的洗眼时间

开关: 手动开关, 拉下洗眼支架自动出水, 无需人工加压, 更加方便快捷

搭配小推车及废水集收箱, 能快速移动到达事发地点, 有效对伤者受伤部位进行清洗, 并集中处理废水。

barrow electronic switch, automatical water (suitable for areas without waterhead)

Model: BTBX11

Material: high-quality non-toxic ABS plastic
volume: 14 gallons / 53, offer more than 15 minutes uninterrupted washing

Switch: electric switch, start switch, automatically water, without manual operation, the faster and more convenient

With a small cart, quickly move to the location of the accident, can effectively clean for the injured.



◎BTBX11-D



◎BTBX11手推车移动洗眼器



◎BTBX14压力冲肤洗眼器

压力型便携式紧急冲肤洗眼器

型号: BTBX14

容量: 5L/8L可选, 可提供连续15分钟以上不间断的洗眼时间。

材质: 优质无毒ABS塑料

配有背带, 方便移动, 适合野外或无水源地使用

Pressure type portable emergency eye washer

Model: BTBX14

volume: 5L/8L(optional), more than 15 minutes uninterrupted washing.

Material: high-quality non-toxic ABS plastic with a strap, easy to move, suitable for field or places without waterhead

DONGTAI YOUNUS TRADING CO.,LTD.



实验室台式紧急洗眼器

型号: BTS24

材质: 304不锈钢, 具有良好的抗油性、防酸、防碱、盐溶液等性能,可安装于试验台或者桌面上, 安装简便, 操作简单。强度高, 结构牢固

洗眼器喷头流量: 12升/分钟



◎BTS24 不锈钢台式洗眼器
BTS24 stainless steel desktop eye washer

stainless steel desktop eye washer

Model: BTS24

Material: 304 stainless steel, with good oil resistance, anti-acid, anti-alkali, salt solution functions. Can be installed on the test bench or on the desktop, it's easy to install and operate. High strength, firm structure. Eye washer nozzle traffic: 12/min

材质: 加厚铜质+高亮度耐腐蚀电镀层

喷头: 软性橡胶+pp

软管: 1.4米金属编织软管, 经久耐用。

水压: 最大耐水压7Mpa

安装方便, 可固定于台面上。

按下压把, 水流能在1秒内快速喷出, 松开压把, 洗眼器关闭, 方便使用。喷头外设防尘盖, 使用时可随水流自动冲开

Material: thick copper + high-brightness, corrosion-resistant corrosion resistance electric plating.

Sprinklers: soft rubber + pp

Hose: 1.4 m metal braided hoses, durable.

Pressure: Maximum water pressure resistance 7 bar

Easy to install and can be fixed on the table.

Press pressure, water flow in seconds quickly ejected, release the pressure of the eyewash off, easy to use. Nozzle peripherals dust cover, use automatically flowing red open.

◎BTS25 实验室两用洗眼器
BTS25 dual-hoe desktop dual use eye washer



◎BTS14P 实验室台式单口洗眼器 (抽取式)
BTS14P the laboratory bench single hole eyewash (removable)



产品名称: 台式单口洗眼器

材质: 不锈钢+不助燃PP材质,

技术参数: 使用压力 (0.2MPa-0.4MPa) 洗眼喷头流量大于7.5升每分钟, 黑色主体: 采用不助燃PC材质模铸一体成型制作。PP供水软管长度1.5米, 最大耐水压7巴。水流成泡沫状水柱,

产品特点: 安装简便, 操作简单。松下压把水即停

The laboratory bench eye washer(PP)

Product Name: desktop single hole eyewash (removable)
Material: stainless steel + combustion PP material, has superior resistance to oil, acids, alkalis, hydrochloric acid solution performance, never rust!

The technical parameters: pressure (0.2MPa-0.4MPa)
Spray head flow greater than 7.5 liters per minute, black body: made of not combustion PC material. PP water supply hose length 1.5 m, maximum resistance to water pressure 7 bar. Water flow into the column-like

Features: easy to install and opened. Loose the handle to stop flowing

◎BTS13P 实验室台式单口洗眼器 (抽取式)
BTS13P the laboratory bench single hole eyewash (removable)

◎BTS11 台式单口洗眼器 (抽取式)
BTS11 desktop single hole eyewasher (removable)



◎BTS12 台式单口洗眼器 (抽取式)
BTS12 desktop single hole eyewasher (removable)

◎BTS22 台式双口洗眼器 (抽取式)
BTS22 desktop dual hole eye washer (removable)



◎BTS21 台式双口洗眼器 (抽取式)
BTS21 desktop dual hole eye washer (removable)



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

防护用品柜

- 1.0mm镀锌钢结构，外喷环氧树脂
- 标准双开门，带有长视窗设计，便于辨认柜内所存放的装备及呼吸器具
- T型隔物架结构，可存放如防护服之类的大件物品
- 层板可上下调节，满足不同尺寸的物件存放
- 柜体正上方有醒目提示标签
- 可选配SCBA存放支架。

Protective equipment cabinet

1.0mm galvanized steel, outside the spray epoxy
Standard double door with long windows designed, be easy to identify equipment and breathing apparatus inside, T-shaped spacer frame structure can store protective clothing etc.
layers can be adjusted up and down to store different size items.
Highlighted label on cabinet
SCBA storage bracket is optional.



产品名称	外部尺寸 (高*宽*深)	门类	
紧急器材柜	800*500*350mm	单开门/手动	
紧急器材柜	750*450*260mm	单开门/手动	一个呼吸器
呼吸器材柜	820*750*260mm	单开门/手动	两个呼吸器
呼吸器材柜	1200*900*500mm	单开门/手动	
防护用品储存柜	1920*900*500mm	单开门/手动	
防护用品储存柜	1920*1200*500mm	单开门/手动	

product number	Size (H*W*D)	door	
Emergency equipment storage cabinet	800*500*350mm	single/manual	
Emergency equipment storage cabinet	750*450*260mm	single/manual	1 breathing apparatus
Breathing apparatus cabinet	820*750*260mm	single/manual	2 breathing apparatus
Breathing apparatus cabinet	1200*900*500mm	single/manual	
Protective equipment storage cabinet	1920*900*500mm	dual/manual	
Protective equipment storage cabinet	1920*1200*500mm	dual/manual	

防火防爆安全柜

高性能的安全柜达到OSHA标准（美国职业安全健康管理局），符合NFPA（美国国家消防协会）第30条规定的要求用于规范存储易燃易爆液体及危险化学品。产品通过欧盟CE认证。

防火安全柜整体为双层防火钢板构造，两层钢板之间间隔38mm阻火层，防火性能更为卓越。

• 采用优质冷轧镀锌钢板，增加强度，防火性能更好。使用寿命十年以上。

• 柜身底部50mm高的防漏液槽最大可能的防止化学液体的外溢。

• 柜体内外都喷涂有持久无铅的环氧树脂漆，具有良好的腐蚀性能。

• 两个可带有防火装置的通风口，分别位于柜身的两侧。

• 标有高可见度警示标签，显而易见。

• 四个可调节水平支架，确保柜体稳固。

• 严格按照OSHA规范，柜身设有静电接地传导端口，方便连接静电接地导线。

在储存化学品的过程中，使用有色标签来识别、整理、分开各种易燃或危险液体。这样做同时又能在发生火灾时方

Anti-fire and explosion safety cabinets

High performance safety cabinets meet OSHA standards (U.S. Occupational Safety and Health Administration), in line with NFPA (National Fire Protection Association) Section 30 requirements for storing flammable liquids and regulate dangerous chemicals.

Fire safety cabinet as a whole for the double steel structure fire, the interval steel is 38mm between two layers, fire resistant layer, fire performance is more remarkable.

◆ high quality cold-rolled galvanized steel, increased strength, fire performance is better. Life is more than a decade.

◆ the bottom of the cabinet body with 50mm high leakproof sump to prevent the maximum possible chemical liquid spills.

◆ the cabinet covered lasting coating lead-free epoxy paint both inside & outside, corrosion resistance better.

◆ Two vents with fire protection devices, which are located on both sides of the cabinet body.

◆ high-visibility warning labels is obvious.

◆ Four adjustable horizontal bracket, ensure cabinet is stable.

◆ according to OSHA standards, cabinet body with static grounding conduction port, connect



黄色为易燃液体储存柜		红色为可燃液体储存柜		蓝色为弱腐蚀性液体储存柜	
规格	外部尺寸 (高*宽*深)	重量	门数	可调节层板	
4加仑/15升	560*430*430mm	28kg	单门/手动	1层	
12加仑/83升	890*590*460mm	68kg	单门/手动	1层	
30加仑/114升	1120*1090*460mm	100kg	双门/手动	1层	
45加仑/170升	1650*1090*460mm	138kg	双门/手动	2层	
60加仑/227升	1650*860*860mm	156kg	双门/手动	2层	
90加仑/341升	1650*1090*860mm	190kg	双门/手动	2层	

yellow flammable liquid storage cabinets		red flammable liquid storage cabinets		Blue weak corrosive liquid storage cabinets	
Specification	Size (H*W*D)	weight	door	Adjustable layer	
4ga/15L	560*430*430mm	28kg	single/manual	1tier	
12ga/83L	890*590*460mm	68kg	single/manual	1tier	
30ga/114L	1120*1090*460mm	100kg	double/manual	1tier	
45ga/170L	1650*1090*460mm	138kg	double/manual	2tiers	
60ga/227L	1650*860*860mm	156kg	double/manual	2tiers	
90ga/341L	1650*1090*860mm	190kg	double/manual	2tiers	

DONGTAI YOUNUS TRADING CO.,LTD.



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

安防设备 SECURITY EQUIPMENT

BT12紧急冲淋房

材 质: 304框架+阳光板壁板
配 置: 内置一台复合式冲淋洗眼器底部设有集水箱, 集中回收废水通过排水口排出, 卫生保。
外 型 尺 寸: 1000mm*900mm*2400mm (尺寸可根据要求定制)
进水口尺寸: 高度2500mm, G1¼内螺纹
排水口尺寸: 1¼外螺纹

The BT12 emergency shower room

Material: 304 frame the + sun siding board
structure: Built-in a composite shower & eye washer
A tank at the bottom to connect waste water then discharged through the outfall, health and environmental protection.
Dimensions: 1000mm * 900mm * 2400mm (size can be customized as per different request)
Water inlet size: height 2500mm, G1¼ thread
Water outlet size: 1¼ external thread



◎BT12 紧急冲淋房
BT12 emergency shower room




◎BT11 紧急冲淋房
BT11 emergency shower room

紧急冲淋房

材 质: 304不锈钢 (304+PP) 可选, 具有超强抗酸、碱, 盐、油腐蚀的性能。
配 置: 内置一台复合式冲淋洗眼器+PVC门帘。用于清洗防化服、眼、面、颈部和手臂等部位。喷头内装有起泡器, 出水柔和; 有效防止因水流过激而对眼部神经和受伤部位造成二次伤害。喷头外设防尘盖, 使用时可随水流自动冲开, 底部设有集水箱, 集中回收废水通过排水口排出, 卫生环保。
外 形 尺 寸: 1000mm*1000mm*2400mm (尺寸可根据要求定制)
进水口尺寸: 高度2500mm, G1¼内螺纹
排水口尺寸: G1¼外螺纹
广泛应用于野外作业、无尘车间等场所。

Emergency shower room

Material: 304 stainless steel (304 + PP) optional, with a super acid, alkali, salt, oil corrosion.
Configuration: Built a composite eyewash + PVC push-pull sliding door.
For cleaning chemical suits, eye, face, neck and arms and other parts. Nozzle built with bubbler. Water is soft. Effectively prevent water excesses while the eye is harmed from secondary damage to the injured area. Nozzle with dust cover, when used with the water rushed to open automatically
Bottom with collection tank, focus on recycling waste water is discharged through the outlet, health and environmental protection.
Dimensions: 1000mm * 1000mm * 2400mm (size can be customized)
Inlet size: Height 2500mm, G1¼ internal thread
Drain Size: G1¼ outer thread
Widely used in field operations, clean room and other places

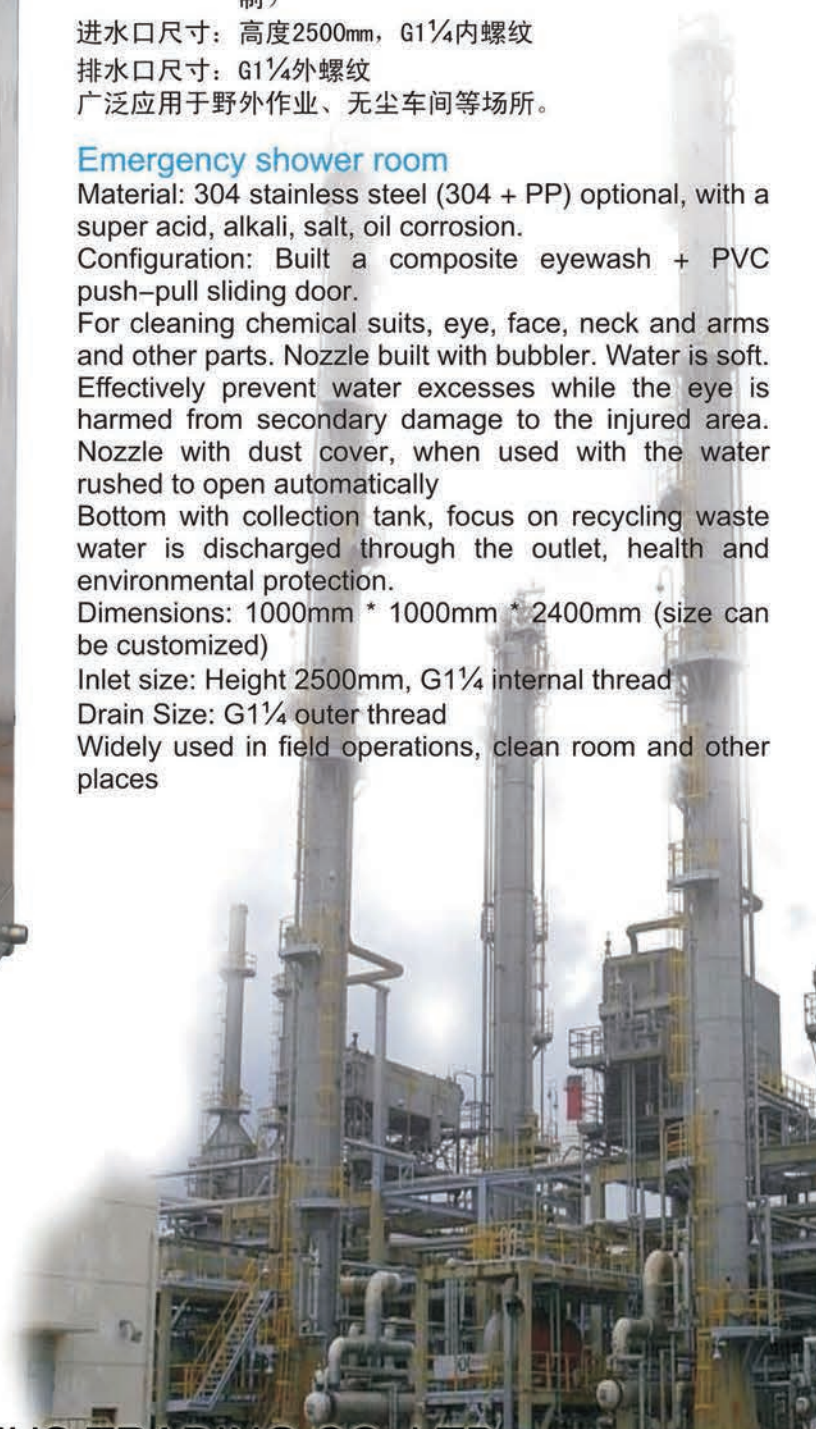

DONGTAI YOUNUS TRADING CO.,LTD.



船用救生衣

- 尺寸: 480 × 280 × 560(mm)
- 重量: < 1.25KG
- 浮力: > 190N
- 用途: 适用于国际航行船舶及沿海、内河船舶船员和旅客救生使用
- 工厂编码: JS0001



Lifejacket

- Dimensions: 480 × 280 × 560(mm)
- Weight: < 1.25KG
- Buoyancy: > 190N
- Purpose: The products are used in life saving for seamen and passengers on board vessels sailing on the sea, coast and river.
- Factory Code: JS0001

船用救生衣

- 尺寸: 480 × 220 × 460(mm)
- 重量: < 0.945KG
- 浮力: > 155N
- 用途: 适用于国际航行船舶及沿海、内河船舶船员和旅客救生使用
- 工厂编码: JS0002



Lifejacket

- Dimensions: 480 × 220 × 460(mm)
- Weight: < 0.945KG
- Buoyancy: > 155N
- Purpose: The products are used in life saving for seamen and passengers on board vessels sailing on the sea, coast and river.
- Factory Code: JS0002

船用救生衣(儿童救生衣)

- 尺寸: 560 × 340 × 140(mm)
353 × 505 × 100(mm)
- 重量: < 0.9KG < 0.6KG
- 浮力: > 147N > 85N
- 用途: 适用于国际航行船舶及沿海、内河船舶船员和旅客救生使用
- 工厂编码: JS0003



Lifejacket(Marine Child Lifejacket)

- Dimensions: 560 × 340 × 140(mm)
353 × 505 × 100(mm)
- Weight: < 0.9KG < 0.6KG
- Buoyancy: > 147N > 85N
- Purpose: The products are used in life saving for seamen and passengers on board vessels sailing on the sea, coast and river.
- Factory Code: JS0003

船用救生衣

- 尺寸: 560 × 340 × 140(mm)
- 重量: < 0.9KG
- 浮力: > 147N
- 用途: 适用于国际航行船舶及沿海、内河船舶船员和旅客救生使用
- 工厂编码: JS0004



Lifejacket

- Dimensions: 560 × 340 × 140(mm)
- Weight: < 0.9KG
- Buoyancy: > 147N
- Purpose: The products are used in life saving for seamen and passengers on board vessels sailing on the sea, coast and river.
- Factory Code: JS0004

气胀式救生衣

- 重量: ≤ 1kg
- 入水后仰角:
面部与水平面夹角 ≥ 40°
躯体与垂直面夹角 ≥ 30°
- 入水干舷: 口部与水平面距离 ≥ 120mm
- 充气成型时间: ≤ 5s
- 漂浮时间: ≥ 24h
- 24小时后浮力损失: ≤ 5%
- 使用环境温度: -30℃ ~ +65℃
- 有效期: 3年
- 工厂编码: JS0005



Inflatable lifesaving

- Weight: ≤ 1kg ;
- Angle in water: face plane angle ≥ 40°
trunk angle ≥ 30° ;
- Freeboard ≥ 120mm;
- inflation time ≤ 5s;
- Float duration ≥ 24h;
- Buoyancy loss after 24h ≤ 5%;
- Ambient temperature for use:
-30℃ ~ +65℃;
- Validity: 3 years
- Factory Code: JS0005

气胀式救生衣

- 重量: ≤ 1kg
- 充气成型时间: ≤ 5s
- 漂浮时间: ≥ 24h
- 24小时后浮力损失: ≤ 5%
- 使用环境温度: -30℃ ~ +65℃
- 有效期: 3年
- 工厂编码: JS0006



Inflatable lifesaving

- weight ≤ 1kg
- Inflation time ≤ 5s
- Floating duration ≥ 24h
- Buoyancy loss after 24h ≤ 5%
- Ambient temperature for use :
-30℃ ~ + 65℃;
- Validity : 3 years
- Factory Code: JS0006

三片式救生衣

- 泡沫橡胶涂层为面料
- 浮力材料: EPE
- 浮力: 75N
- 工厂编码: JS0007



Un-full Coversheet Lifejacket

- Shell fabric: Foam rubber coating
- Buoyancy material: EPE
- Buoyancy: 75N
- Factory Code: JS0007

船用救生衣

- 涤纶长丝面料
- 浮力材料: EPE
- 浮力: 103N
- 工厂编码: JS0008



Lifejacket

- Shell fabric: Dacron and filament yarn
- Buoyancy material: EPE
- Buoyancy: 103N
- Factory Code: JS0008



工作救生衣

- 涤纶长丝面料
- 浮力材料: PE板材
- 浮力: 75N
- 工厂编码: JS0009



Working Lifejacket

- Shell fabric: Dacron and filament yarn
- Buoyancy material: PE sheet material
- Buoyancy: 75N
- Factory Code: JS0009

工作救生衣

- 涤纶长丝面料
- 浮力材料: PE板材
- 浮力: 75N
- 工厂编码: JS0010



Working Lifejacket

- Shell fabric: Dacron and filament yarn
- Buoyancy material: PE sheet material
- Buoyancy: 75N
- Factory Code: JS0010

钓鱼服

- 涤纶长丝面料
- 浮力材料: PE板材
- 浮力: 75N、110N、150N
- 工厂编码: JS0011



Fishing Lifejacket

- Shell fabric: Dacron and filament yarn
- Buoyancy material: PE sheet material
- Buoyancy: 75N, 110N, 150N
- Factory Code: JS0011

海事救生衣

- 涤纶长丝面料
- 浮力材料: PE板材
- 浮力: 75N
- 工厂编码: JS0012



Marine Lifejacket

- Shell fabric: Dacron and filament yarn
- Buoyancy material: PE sheet material
- Buoyancy: 75N
- Factory Code: JS0012

浸水保温服I型

- 保温性能: 在0℃-2℃之间的平静水流中浸泡 6小时, 体温不低于正常体温2℃
- 浮力: $\geq 142N$
- 尺码: M, L, XL
- 重量: 4.5kg
- 2件装尺寸: 580 × 420 × 360mm
- 认可机构: CCS/EC/RS
- 工厂编码: JS0013



Immersion Suit Type-I

- Thermal protectiveness: After immersing in the 0℃-2℃ static water for 6th, the body temperature shall not be more than 2℃ lower than the normal level.
- Buoyancy: $\geq 142N$
- Weight: 4.5kg
- Sizes: M, L, XL
- Packing size: 580 × 420 × 360mm
- Approval: CCS/EC/RS
- Factory Code: JS0013

浸水保温服II型

- 保温性能: 在0℃-2℃之间的平静水流中浸泡 6小时, 体温不低于正常体温2℃
- 浮力: $\geq 142N$
- 尺码: M, L, XL
- 重量: 5kg
- 2件装尺寸: 580 × 420 × 360mm
- 认可机构: CCS/EC/RS
- 工厂编码: JS0014



Emergency Escape Breathing Devices

- Thermal protectiveness: After immersing in the 0℃-2℃ static water for 6th, the body temperature shall not be more than 2℃ lower than the normal level.
- Buoyancy: $\geq 142N$
- Sizes: M, L, XL
- Weight: 5kg
- Packing size: 580 × 420 × 360mm
- Approval: CCS/EC/RS
- Factory Code: JS0014

救生圈

- 符合SOLAS 1974及其最新修正案;
- 外壳材料: 高密度聚乙烯;
- 填充物材料: 硬质聚氨酯;
- 抛落高度: 80米
- 外径: 720mm 内径: 440mm
- 厚度: 105mm 浮力: $> 14.5kg$
- 重量: 2.5kg/4.3kg
- 颜色: 橙色
- 认可机构: CCS/EC
- 工厂编码: 2.5kg JS0044
4.3kg JS0045



Lifebuoy

- Outer Dia: 720mm
- Inner Dia: 440mm
- Thickness: 105mm
- Buoyancy: $> 14.5kg$
- Weight: 2.5kg/4.3kg
- Color: Orange
- Approval: CCS/EC
- IMPA Code: 2.5kg JS0044
4.3kg JS0045

充气式安全圈

- 重量: $< 0.6kg$
- 浮力: $\geq 78.4N$
- 充气成型时间: $\leq 5s$
- 24小时后浮力损失: $\leq 5\%$
- CO2气体重量: 17g
- 漂浮时间: $\geq 24h$
- 使用环境温度: -30℃ ~ +65℃
- 有效期: 3年
- 工厂编码: JS0046



Inflatable Aquatic Safety Buoy Products Description

- Weight: $< 0.6kg$
- Buoyancy: $\geq 78.4N$
- Inflation time: $\leq 5s$
- Buoyancy loss after 24h: $\leq 5\%$
- CO2 weight: 17g
- Float duration: $\geq 24h$
- Ambient temperature for use: -30℃ ~ +65℃
- Validity: 3 years
- Factory Code: JS0046



自扶正气胀救生筏
Self-righting inflatable life rafts

- 认可机构: CCS/EC
- 工厂编码: JS0017
- Approval:CCS/EC
- Factory Code:JS0017



型号Type	KHZ-6	KHZ-10	KHZ-15	KHZ-20	KHZ-25	KHZ-50	KHZ-100	KHZ-110	KHZ-125
外形Physica	长八边形	长八边形	长八边形	长八边形	长八边形	长十二边形	长十二边形	长十二边形	长十二边形
核定乘员	6	10	15	20	25	50	100	110	125
长度(mm) $\pm 100_0$	2800	3510	4300	4900	5300	7311	11060	11550	12000
宽度(mm) $\pm 100_0$	1660	2000	2400	2700	3100	4240	5260	5600	6100
高度(mm) ± 50	1500	1700	2050	2250	2350	3000	3250	3450	3650
筏壳	直径(mm)	615	670	690	730	745	895	1050	1050
	长度(mm)	1095	1135	1285	1440	1485	2095	2400	2400
重量kg $\leq$	85	114	142	185	212	445	780	860	920

可吊式气胀救生筏
Davit-launched inflatable life rafts

- 认可机构: CCS/EC
- 工厂编码: JS0018
- Approval:CCS/EC
- Factory Code:JS0018



型号 Type	KHD-12	KHD-15	KHD-16	KHD-20	KHD-25
外形 Physica	正八边形	正十边形	正十边形	正十边形	正十二边形
核定乘员	12	15	16	20	25
长度(mm), $\pm 100_0$	2990	3300	3430	3780	4180
宽度(mm), $\pm 100_0$	2990	3300	3430	3780	4180
高度(mm), ± 50	1750	1850	1950	2100	2250
筏壳	直径(mm)	695	700	700	790
	长度(mm)	1285	1275	1275	1390
重量, kg $\leq$	137	153	163	188	211

抛投式气胀救生筏
Throw-overboard Inflatable Liferatt

- 认可机构: CCS/EC
- 工厂编码: JS0019
- Approval:CCS/EC
- Factory Code:JS0019



承载人数 Capacity	外形尺寸 Dimensions	筏重 Weight	存放筒尺寸 Container size	国际编码 IMPA Code
6人	L2170×W2170×H1250	≤75Kg	Φ615×L1095	33 01 01
10人	L2730×W2730×H1400	≤98Kg	Φ670×L1135	33 01 02
15人	L3300×W3300×H1500	≤127Kg	Φ690×L1285	33 01 03
20人	L4390×W4390×H1500	≤155Kg	Φ690×L1285	33 01 04
25人	L4770×W4770×H1500	≤180Kg	Φ735×L1495	33 01 05

静水压力释放器 Hydrostatic Release Unit



- 释放深度: 2-4m
 - 易断绳: $2.2 \pm 0.4\text{kn}$
 - 工厂编码: JS0020
 - 认可机构: CCS/EC
 - 适用于气胀式救生筏快速释放, 当船舶遇难沉没时, 它能在2-4m水深处使气胀式救生筏与沉船自动分离, 达到救生目的。
- Release Depth:2-4m
Easy-breaking Rope: $2.2 \pm 0.4\text{kn}$
Factory Code:JS0020
Approval:CCS/EC
It is quick release device for inflatable liferafts,in the event the ship sinks,it will automatically release the liferaft within 2-4meters of water depth.

救生筏架 Liferatt Deck Cradle



- 型号: 通用型
- 适用于6-25人的救生筏
- 材质: Q235
- 工厂编码: JS0021
- Type:Universal type
- For 6-25 person liferaft containers
- Material:Q235
- Factory Code:JS0021



引航员软梯

- 符合SOLAS 1974及其最新修正案；
- 踏板间距：330±20mm；
- 踏板材料：硬木；
- 最下四级：钢衬橡胶踏板
- 外形尺寸：各种尺寸
- 国际编码：33 02
- 认可机构：CCS/EC
- 工厂编码：JS0034



Pilot Ladder

- SOLAS1974, as amended
- The distance between two neighboring steps is 330±20mm
- Step material: Hard Wood
- The lowest 4 steps are rubber plates with steel lining.
- The Max. Quantity of Step: 30 steps
- Dimensions: Assorted
- IMPA Code: 33 02
- Approval: CCS/EC
- Factory Code: JS0034

登乘梯

- 符合SOLAS 1974及其最新修正案；
- 踏板间距：330±20mm；
- 踏板材料：硬木；
- 最下四级：钢衬橡胶踏板
- 外形尺寸：各种尺寸
- 国际编码：33 02
- 认可机构：CCS/EC
- 工厂编码：JS0035



Embarkation Ladder

- SOLAS1974, as amended
- The distance between two neighboring steps is 330±20mm
- Step material: Hard Wood
- The lowest 4 steps are rubber plates with steel lining.
- The Max. Quantity of Step: 30 steps
- Dimensions: Assorted
- IMPA Code: 33 02
- Approval: CCS/EC
- Factory Code: JS0035



木踏板
Wood Step



橡胶板
Rubber Plate



铝合金板
Aluminum alloy step



三角木
Corner blocks

铜锣

- 直径：404mm
- 声级：≥100dB
- 材质：HPb59-1
- 工厂编码：JS0051



Brass Gong

- Diameter: 404mm
- Audio grade: ≥100dB
- Material: HPb59-1
- Factory Code: JS0051

雾钟

- 直径：100-300mm
- 声级：≥100dB
- 材质：HPb59-1
- 工厂编码：JS0052



Copper Bell

- Diameter: 100-300mm
- Audio grade: ≥100dB
- Material: HPb59-1
- Factory Code: JS0052

气胀式救生环

- 重量：<1kg
- 浮力：≥78.4×2N
- 充气成型时间：≤5s
- 24小时后浮力损失：≤5%
- CO2气体重量：17×2g
- 漂浮时间：≥24h
- 使用环境温度：-30℃~+65℃
- 有效期：3年
- 工厂编码：JS0047




Inflatable life ring Products Description

- Weight: <1kg
- Buoyancy: ≥78.4×2N
- Inflation time: ≤5s
- Buoyancy loss after 24h: ≤5%
- CO2 weight: 17×2g
- Float duration: ≥24h
- Ambient temperature for use: -30℃~+65℃
- Validity: 3 years
- Factory Code: JS0047

救生浮

- 浮力：挂重232kg 放在水中露出水面高度大于50mm
- 芯材：聚苯乙烯闭孔泡沫塑料
- 总重量：10-22kg
- 乘员：8-16人
- 工厂编码：JS0048

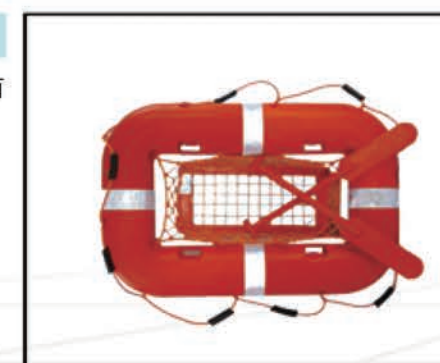

life float

- Buoyancy: It can be 50mm above the water at the load of 232kg
- Inner material: Polystyrene closed-cell foam plastics
- Total weight: 10-22kg
- Number of people: 8-16 people
- Factory Code: JS0048



自给正压式消防空气呼吸器

- 气瓶体积: 6.8L/9L/12L
- 额定储气量: 2040L
- 工作压力: 300Bar
- 报警压力: 50-60Bar
- 单件重量: 17Kg
- 工厂编码: XF0001
- 认可机构: CCS/EC/RS
- 包装尺寸: 730×300×450mm



Self-Contained Positive Pressure Air Breathing Apparatus

- Air Cylinder Volume: 6.8L/9L/12L
- Air Storage capacity: 2040L
- Normal working pressure: 300Bar
- Alarm pressure: 50-60Bar
- Weight: 17Kg
- Factory code: XF0001
- Approval: CCS/EC/RS
- Packing size: 730×300×450mm

推车式长管呼吸器

- 气瓶容积: 4×6.8L
- 工作压力: 210Bar
- 单件重量: 100kg
- 包装尺寸: 1070×650×880mm
- 工厂编码: XF0005



Wheeled Breathing Apparatus with a long tube

- Air Cylinder Volume: 4×6.8L
- Normal working pressure: 210Bar
- Weight: 100kg
- Packing size: 1070×650×880mm
- Factory Code: XF000005

自给正压式消防空气呼吸器

- 气瓶体积: 5L/6L
- 额定储气量: 1800L
- 工作压力: 300Bar
- 报警压力: 50-60Bar
- 单件重量: 21Kg
- 工厂编码: XF0002
- 认可机构: CCS/EC/RS
- 包装尺寸: 730×300×450mm



Self-Contained Positive Pressure Air Breathing Apparatus

- Air Cylinder Volume: 5L/ 6L
- Air Storage capacity: 1800L
- Normal working pressure: 300Bar
- Alarm pressure: 50-60Bar
- Weight: 21Kg
- Factory code: XF0002
- Approval: CCS/EC/RS
- Packing size: 730×300×450mm

紧急逃生呼吸装置

- 持续使用时间: ≥15min
- 气瓶容积: 3L
- 工作压力: 210Bar
- 单件重量: 7kg
- 包装尺寸: 590×250×175mm
- 认可机构: CCS/EC/RS
- 工厂编码: XF0006



Emergency Escape Breathing Devices

- Durayion: ≥15min
- Air Cylinder Volume: 3L
- Normal working pressure: 210Bar
- Weight: 7kg
- Packing size: 590×250×175mm
- Approval: CCS/EC/RS
- Factory Code: XF000006

自给正压式消防空气呼吸器

- 气瓶体积: 6.8L
- 额定储气量: 4080L
- 工作压力: 300Bar
- 报警压力: 50-60Bar
- 单件重量: 23Kg
- 工厂编码: XF0003



Self-Contained Positive Pressure Air Breathing Apparatus

- Air Cylinder Volume: 6.8L
- Air Storage capacity: 4080L
- Normal working pressure: 300Bar
- Alarm pressure: 50-60Bar
- Weight: 23Kg
- Factory code: XF0003

电动送风呼吸器

- 送风流量: >1000L/min
- 风 压: 1000pa
- 额定功率: 180w
- 额定电压: 220V
- 管 长: 20m 30m
- 重 量: 19kg
- 包装尺寸: 610×300×550mm
- 工厂编码: XF0007



Electric Supply Respirator With A Long Tube

- Supply Air Flow: >1000L/Min
- Air pressure: >1000Pa
- Power rating: 180W
- Rated voltage: 220V
- Length of tube: 20m 30m
- Weight: 19kg
- Package size: 610×300×550mm
- Factory Code: XF000007

推车式长管呼吸器

- 气瓶容积: 2×9L
- 工作压力: 300Bar
- 单件重量: 74kg
- 包装尺寸: 1070×740×640mm
- 工厂编码: XF0004



Wheeled Breathing Apparatus with a long tube

- Air Cylinder Volume: 2×9L
- Normal working pressure: 300Bar
- Weight: 74kg
- Packing size: 1070×740×640mm
- Factory Code: XF0004

自吸式长管呼吸器

- 本产品属于作业型呼吸保护装置, 主要用来防御吸入有气体、粉尘、烟雾等污染物质。
- 管 长: 10m
- 重 量: 7kg
- 包装尺寸: 730×300×550mm
- 工厂编码: XF0008



Self-priming Breathing Apparatus With A Long Tube

- This product belongs to the type of respiratory protection equipment, mainly used for defense of gas, dust, smoke and other air pollutants.
- Length: 10m
- Weight: 7kg
- Package size: 730×300×550mm
- Factory Code: XF0008



呼吸器配件
Accessories



5L/6L气瓶总成
5L/6LSpare Cylinder



- 工厂编码: XF0012
- Factory Code:XF0012



6.8L/9L/12L气瓶总成
6.8L/9L/12LSpare Cylinder



- 工厂编码: XF0013
- Factory Code:XF0013

背托
Back care



压力表
Pressure gage and
alarm whistle

- 工厂编码: XF0014
- Factory Code:XF0014



- 工厂编码: XF0015
- Factory Code:XF0015



全面罩
Full face mask



瓶头阀
Cylinder Valve

- 工厂编码: XF0016
- Factory Code:XF0016



供气阀
Air supply valve

快速接头
Fast Interface

- 工厂编码: XF0018
- Factory Code:XF0018



减压器
Pressure regulator

- 工厂编码: XF0017
- Factory Code:XF0017

防毒面罩

- 防素类型: 综合防毒
- 防毒范围: 氢氰酸、氯化氰、砷化氢、光气、氯化苦、苯、溴甲烷、路易氏气、磷化氢苯、氯气、丙酮、醇类、苯类、二硫化碳、四氯化碳、氯仿、溴甲烷、氯甲烷、硝基烷氨、硫化氯一氧化硫、汞蒸气、二氧化硫、氯气、硫化氢、氨的氧化物、光气、磷和含氯有机农药、各种有机蒸气、氢氰酸及其衍生物、毒烟、毒雾。
- 工厂编码: XF0018



Anti-toxic face mask

- Anti-toxic type:Universal
- Anti-toxic range:HCN,Hydrogen Chloride, Arsine, Arsine, Phosgene, Benzene,Bromomethane,Lewisite,Phosphine,Benzene, Chlorine, Acetone, lcohol, Carbon disulfide, Tetrachlorocarbon, Chloroform, Bromomethane, Nitromethane,Ammonia,Hydrogen sullfide, Carbon monoxide, Mercuryvapor Sulfur dioxide, Chlorine,Hydrogen sulfide, Phosgene,Hydrogen sulfide,Organic vapor,HCN.Toxic smoke,Toxic fume.
- Factory Code: XF0018

带导管的防毒面具

- CO使用时间: > 110 min
- HCN使用时间: > 40min
- 透过率: < 0.05%
- 总视野: 40%
- 吸气阻力: < 20dapa
- 双目视野: 30%
- 漏气系数: < 0.0001%
- 工厂编码: XF0019



Gas Mask With A Tube

- CO using time: > 110 min
- HCN using time: > 40min
- Gas transmission rate: < 0.05%
- Total vision: 40%
- Inhalation resistance: < 20dapa
- Binocular vision: 30%
- Gas leakage factor: < 0.0001%
- Factory Code: XF0019

中型罐防毒面具

- CO使用时间: > 110 min
- HCN使用时间: > 40min
- 透过率: < 0.05%
- 总视野: 40%
- 吸气阻力: < 20dapa
- 双目视野: 30%
- 漏气系数: < 0.0001%
- 工厂编码: XF0020



Gas Mask With A Medium Can

- CO using time: > 110 min
- HCN using time: > 40min
- Gas transmission rate: < 0.05%
- Total vision: 40%
- Inhalation resistance: < 20dapa
- Binocular vision: 30%
- Gas leakage factor: < 0.0001%
- Factory Code: XF0020

消防过滤式自救呼吸器

- 防毒时间: ≥40分钟, 防毒、防火、防热辐射、防烟
- 防护对象: 一氧化碳(CO)、氰化氢(HCN)、毒烟、毒雾。
- 油雾透过系数< 5%
- 吸气阻力< 800 Pa
- 呼气阻力< 300Pa
- 工厂编码: XF0021



Filtering Self-rescue Respirator

- Protective time: ≥40min, gas, fire, heat, smoke prevention.
- Prevent for: CO, HCN, toxic smoke, gas
- Oil mist transmission rate: < 5%
- Inhalation resistance: < 800 Pa
- Exhalation resistance: < 300Pa
- Factory Code: XF0021



消防员装备
Fire fighting equipment



- 工厂编码: XF0025
- Factory Code:XF0025

消防员隔热服

- 技术参数: 铝箔复合阻燃材料, 10KW/m²辐射热源照射30S后, 其内表面温升不大于25℃
- 数量: 1套
- 备注: 包括上衣、裤子、脚套、手套
- 工厂编码: XF0026



Heat-insulation suit

- Technical: It is constructed by an aluminum foil compound flame-resisting material, the raise of inner temperature of the suit is not higher than 25℃ after it is shined 30 seconds by a 10kw/m² heat radiator
- Amount: 1 set
- Remark: It consists of jacket, pants, foot cover, glove.
- Factory Code:XF0026

消防员隔热服

- 执行标准: SOLAS1974, MSC.36(63), MSC.97(73), MSC.98(73), ISO 15538: 2001
- 配套装置: 上衣、裤子和鞋套组成。如果需要, 还可以装备相适应的呼吸防护装置。
- 工厂编码: XF0027



Heat-insulation suit

- Implementation of standards: SOLAS1974, MSC.36 (63), MSC.97 (73), MSC.98 (73), ISO 15538: 2001
- Fitted items: The clothing consists of a coat, a pair of trousers, and a pair of gaiters. This protective clothing can also be used jointly with suitable breathing protective apparatus. fire boots.
- Factory Code:XF0027

避火服

- 避火服采用进口面料制作而成, 是消防队员进入火场进行灭火战斗和抢险救援时穿着的防护服装, 是消防队员特种个人防护装备之一, 具有良好的耐火焰、隔热、抗辐射热渗透性能。
- 性能参数:
耐火焰温度850℃, 防辐射温度1050℃
- 组成: 头罩、上衣、背带裤、防火靴、防火手套
- 重量: 10kg
- 工厂编码: XF0022



Fire-Entry suit

- Being made of imported fabric, fire entry for being dressed by fire-fighting personnel the fire-fighting and salvage operations. This suit is the protective clothing available to enter the fire site for implementing suit is one of special personal protective equipment for fire fighters, which is provided with the characteristics of fire pre-vention, thermal insulation, radiation and thermosmosis resistances.
- Parameters for Performance:
Temperature for anti-flame:850℃;
Temperature for radiation resistance:1050℃.
- Components:Hood,jacket,suspender trousers,fireproof overshoes and fireproof gloves.
- Weight:10kg
- Factory Code: XF0022

消防员灭火防护服

- 材质: 外层(间位芳纶+对位芳纶+导电纤维)
防水透气层(芳纶毡覆合PTFE膜)
隔热层(芳纶毡)
舒适层(芳纶、阻燃粘胶混纺)
- 特性: ①阻燃性能
损毁长度≤10cm、
续燃时间≤2s
②耐静水压≥50kPa
③透气量≥5000g/m².24h
④TPP值≥28Cal/cm²
⑤重量≤2.65kg
- 工厂编码: XF0023



Protective clothing for firefighters

- Characteristics:Performance for flame-retardant
Char length≤ 10cm
Flame duration ≤2s
Hydrostatic pressure resistance ≥ 50kPa
Air-permeability≥5000g/m².24h
TPP Value≥ 2828Cal/cm²
Weight≤ 2.65kg
- Factory Code: XF0023

阻燃战斗服

- 用于身体防护。具备阻燃、防水、防静电、透气、耐染和标识性强等性能。材质为阻燃抗湿织物。包括上衣、裤子、头盔、腰带、靴子
- 型号: 94型/97型
- 尺寸: L,XL
- 工厂编码: XF0024



Hinder-burn burner clothing

- Used for body protection. With the characters such as flame-retardant, waterproof, Anti-static, breathable, strong resistance to dye and easy to identify. Including the kacket, trousers, helmet, belt and boots. The material is flame retardant and moisture resistant fabric.
- Type: 94/ 97
- Size: L, XL
- Factory Code: XF0024



保护设备 Protective equipments
共5件套 5sets in total

CCS

- 工厂编码: XF0033
- Factory Code:XF0033



防化大围裙
Chemical Protective Apron



长袖手套
Long Gloves



防化服
Anti-chemical Clothes



护目镜
Goggle



消防胶靴
Fire-Fighting Rubber boots

安全设备 Safety equipments
共7件套 7 sets in total

CCS

- 工厂编码: XF0035
- Factory Code:XF0035



空气呼吸器
Breathing Apparatus



防爆灯
Exposition Proof Lamp



耐火救生绳
Fireproof lifeline



防化服
Anti-chemical Clothes



消防胶靴
Fire-Fighting Rubber boots



安全腰带
Belt



护目镜
Goggle

消防员一级化学防护服

- 采用经阻燃处理的锦丝绸布，双面涂覆阻燃防化面胶制成，全密封连体结构，由常大视窗的连体头罩、化学防护服、正压式消防空气呼吸器(内置)、化学防护靴、化学防护手套组成。
- 单件尺寸: 190cm以上
- 2件装尺寸:
580×420×360mm
- 认可机构: GL/CE
- 工厂编码: XF0034



CCS

Chemical protective class one ensemble for firefighters

- Sewing to the use of frame-resistant and adhesive strong the Nylon, with both-sides being covering with chemical protective and fire-resistant rubber.The seal structure,made full seal structure by normal big Windows connected the hood, chemical protective clothing, Self-contained breathing apparatus (built-in), chemical protection boots, chemical protective Composition.
- Size:One size up to 190
- Two pack size 580x420x360mm
- Approval:EC/GL
- Factory Code No:XF0034

消防员二级化学防护服

- 采用连体式结构，保证安全覆盖使用者。由化学防护头罩、化学防护服、化学防护手套构成，与外置正压式消防空气呼吸器配合使用。
- 单件尺寸: 190cm以上
- 重量: 5kg
- 2件装尺寸: 580×420×360mm
- 认可机构: CE/劳保检验报告
- 工厂编码: XF0036



CCS

Chemical protective class two ensemble for firefighters

- Using the coverall structure to ensure safety covered the users,consist of The chemical protective hoods, chemical protective clothing, chemical protective gloves cooperate with the external Self-contained breathing apparatus.
- Size:One size up to 190
- Weight:5kg
- Two pack size :580x420x360mm
- Approval:EC
- Factory Code No:XF0036



手提贮压式干粉灭火器

- 认可机构: MED
- 执行标准: EN1866-1(2007)
- 置放温度: +5~+60℃
- 灭火级别: 113B 21A
- 外包装: 18×20×56(cm)
- 重量: 10.3kg
- 工厂编码: XF0045



Portable dry power Fire Extinguisher

- Type: MF/ABC6
- Approval: MED
- Implementation of standards: EN1866-1(2007)
- Ambient temperature: +5~+60℃
- Class of extinguishing: 113B 21A
- Outer packing: 18×20×56(cm)
- Weight: 10.3kg
- Factory Code:XF0045

推车式干粉灭火器

- 灭火剂类型:
磷酸二氢铵NH₄H₂PO₄ 50%、
硫酸铵(NH₄)₂SO₄ 25%
- 灭火剂量: 35KG、50KG
- 筒体水压试验压力: 2.1Mpa
- 灭火剂级别: 6A,183B、
10A,233B
- 工厂编码: XF0049



Transportable Dry Powder Fire-extinguishers

- Type of Extinguishing Agent:
NH₄H₂PO₄ 50%、(NH₄)₂SO₄ 25%
- Quantity of Extinguishing Agent:
35KG、50KG
- Water test Press.of Body: 2.1Mpa
- Fire Class: 6A,183B、10A,233B
- Factory Code:XF0049

手提式CO₂灭火器

- 灭火剂类型: CO₂
- 灭火剂量: 5KG、7KG
- 筒体水压试验压力: 25Mpa
- 灭火剂级别: 34B、55B
- 工厂编码: XF0046



Portable Carbon Dioxide Fire-extinguishers

- Type of Extinguishing Agent: CO₂
- Quantity of Extinguishing Agent:
5KG、7KG
- Water test Press.of Body: 25Mpa
- Fire Class: 34B、55B
- Factory Code:XF0046

推车式水基型（泡沫）灭火器

- 灭火剂类型: H₂O97%、AFFF3%
- 灭火剂量: 45L、65L、135L
- 筒体水压试验压力: 2.1Mpa
- 灭火剂级别: 4A,183B、6A,233B、
10A,297B
- 工厂编码: XF0050



Wheeled Water Spray Fire-extinguishers

- Type of Extinguishing Agent:
H₂O97%、AFFF3%
- Quantity of Extinguishing Agent: 45L、
65L、135L
- Water test Press.of Body: 2.1Mpa
- Fire Class: 4A,183B、6A,233B、
10A,297B
- Factory Code:XF0050

手提式干粉灭火器

- 灭火剂类型:
磷酸二氢铵NH₄H₂PO₄ 50%、
硫酸铵(NH₄)₂SO₄ 25%
- 灭火剂量:
2 KG、4 KG、5 KG、6 KG、8 KG
- 筒体水压试验压力: 2.1Mpa
- 灭火剂级别: 2A,55B、2A,55B、
3A,89B 3A,89B、4A,144B
- 工厂编码: XF0047



Portable Dry Powder Fire-extinguishers

- Type of Extinguishing Agent:
NH₄H₂PO₄ 50%、
(NH₄)₂SO₄ 25%
- Quantity of Extinguishing Agent:
2 KG、4 KG、5 KG、6 KG、8 KG
- Water test Press.of Body: 2.1Mpa
- Fire Class: 2A,55B、2A,55B、3A,89B
3A,89B、4A,144B
- Factory Code:XF0047

水雾枪

- 额定工作压力: 0.35Mpa
- 流量: ≥210L/min/315L/min
- 最大喷射角度: 180 degree
- 喷射半径: ≥4m
- 适用介质: 海水
- 认可机构: CCS/GL
- 工厂编码: XF0051



Water fog applicator

- Rated working pressure:0.35Mpa
- Flow rate:≥210L/min/315L/min
- Max spray angle:180 degree
- Eject distance:≥4m
- Applicable medium:seawater
- Approval:CCS/GL
- Factory Code:XF0051

手提式水基型（泡沫）灭火器

- 灭火剂类型: AFFF 3%
- 灭火剂量: 6 L、9 L
- 筒体水压试验压力: 2.1Mpa
- 灭火剂级别: 1A,55B、2A,89B
- 工厂编码: XF0048



Portable Water Spray Fire-extinguishers

- Type of Extinguishing Agent: AFFF 3%
- Quantity of Extinguishing Agent: 6 L、9 L
- Water test Press.of Body: 2.1Mpa
- Fire Class: 1A,55B、2A,89B
- Factory Code:XF0048

灭火器支架

- 规格尺寸: 各种尺寸
- 材质: 不锈钢/Q235
- 工厂编码: XF0052



Fire extinguisher support

- Dimensions:Assorted'
- Material:stainless steel/Q235
- Factory Code:XF0052



玻璃钢制品

Glass Fiber Reinforced Plastic Series

工厂编码: XF0069

Factory Code: XF0069



消防员装备箱
Fireman's outfit box



救生圈释放装置
Lifebuoys release device



EEBD逃生呼吸器箱
EEBD escape respirator box



救生衣箱
Life jacket box



黄沙箱
Yellow sand box



电瓶箱
Battery box



灭火器箱
Fire Extinguisher Box



装备箱
Equipment box



消防员装备柜
Fireman equipment cabinet



消火栓箱
Fire hydrant box



圆水带箱
Round fire hose box



救生筏存放桶
Storing Bucket of Glass Fiber Reinforced Plastic for Inflatable Life Raft

消防水带箱

- 外形尺寸: 560 × 650 × 230mm
- 箱体材质: 玻璃钢
- 内罗盘直径: 420mm
- 工厂编码: XF0070



Fire Hose Box

- Dimensions: 560 × 650 × 230mm
- Box material: FRP
- The diameter of inner compass: 420mm
- 工厂编码: XF0070

消火栓

- 结构形式: 90度
- 进水口: 法兰/螺纹
- 出水口:
 - STORZ DN50 2"
 - STORZ DN65 2-1/2"
 - Nakajima DN40 1-1/2"
 - Nakajima DN50 2"
 - Nakajima DN65 2-1/2"
- 材质: 黄铜
- 适用介质: 海水
- 工厂编码: XF0065



Hydrant

- Structure style: 90 degree
- Inlet: Flange/Screw thread
- Outlet:
 - STORZ DN50 2"
 - STORZ DN65 2-1/2"
 - Nakajima DN40 1-1/2"
 - Nakajima DN50 2"
 - Nakajima DN65 2-1/2"
- Material: Brass
- Applicable medium: Seawater
- Factory Code: XF0065

消火栓

- 结构形式: 直型
- 进水口: 法兰/螺纹
- 出水口:
 - STORZ DN50 2"
 - STORZ DN65 2-1/2"
 - Nakajima DN40 1-1/2"
 - Nakajima DN50 2"
 - Nakajima DN65 2-1/2"
- 材质: 黄铜
- 适用介质: 海水
- 工厂编码: XF0066



Hydrant

- Structure style: Straight
- Inlet: Flange/Screw thread
- Outlet:
 - STORZ DN50 2"
 - STORZ DN65 2-1/2"
 - Nakajima DN40 1-1/2"
 - Nakajima DN50 2"
 - Nakajima DN65 2-1/2"
- Material: Brass
- Applicable medium: Seawater
- Factory Code: XF0066

消防水带

- 非防腐材料
- 阻燃
- 单面衬里重量: 146-294g/m
- 双面橡胶重量: 230-420g/m
- 认可机构: CCS/EC
- 工厂编码: XF0057



Fire Hose

- Non corrosion-proof
- Flam retardant
- Single-sided lining weight: 146-294g/m
- Double-sided rubber weight: 230-420g/m
- Approval: CCS/EC
- Factory Code: XF0057

消防炮

- 额定工作压力: 0.5 ~ 1.0 MPa
- 额定工作压力上限: 1.0 MPa
- 喷射流量: 混合液24L/S、水24L/S
- 射程: ≥40m
- 水平回转: ≥±180°
- 最大仰角: ≥±70°
- 最小俯角: ≤-60°
- 流量允差: ±8%
- 发泡倍数(20℃时): ≥6
- 25%析液时间(20℃时): ≥2.5min
- 工厂编码: XF0041



Monitor

- Service Pressure: 0.5 ~ 1.0 MPa
- Max Service Pressure: 1.0 MPa
- Spray Capacity: Mixed Liquids 24L/S, Water 24L/S
- Range: ≥40m
- Horizontal Rotary: ≥±180°
- Max Angle of Elevation: ≥±70°
- Max Angle of Depression: ≤-60°
- Allowable Error of Discharge Capacity: ±8%
- Foaming Times (at 20℃): ≥6
- 25% Discharge Time (at 20℃): ≥2.5min
- Factory Code: XF0041



YSY-D001	Diving Suit		Wet suit Size: XS-XL Thickness: 3mm Color: Black
YSY-D002	Diving Suit		Wet suit Size: XS-XL Thickness: 5mm Color: Black
YSY-D003	Diving Suit		Dry suit Size: XS-XL Thickness: 5mm Color: Grey and black
YSY-D004	Diving Suit		Dry suit Size: XS-XL Thickness: 7mm Color: Brown and black

YSY-D005	Mask		Glasses: Toughened glass Tape: Silicone Frame: PC and stainless steel
YSY-D006	Mask & Snorkel Set		Glasses: Explosion-proof toughened glass Frame: PC Food grade silicone PVC Snorkel Full dry type snorkel Length of snorkel: 44cm
YSY-D007	Fins		Color: Black Material: Rubber Size: 28 - 32 Non-adjustable
YSY-D008	Fins		Color: Black and blue Rubber and plastic Size: 34 - 47 Adjustable
YSY-D009	Fins		Jet fins Color: Black Material: Rubber Weight: 3kg Length: 50cm Width: 23cm Adjustable



东台市永升悦贸易有限公司

DONGTAI YOUNUS TRADING CO.,LTD.

潜水装备 DIVING EQUIPMENT

YSY-D010	Gloves		Size: XS-XL Thickness: 3mm Color: Black
YSY-D011	Hat		Size: XS-XL Thickness: 3mm Color: Black
YSY-D012	Boots		Size: 36 - 47 Style: High shoes Color: Black Thickness: 5mm
YSY-D013	Breathing Tank		Capacity: 12L Material: Carbon steel Weight: 15kg Wall thickness: 12.5mm Nominal working pressure: 20Mpa Hydraulic test pressure: 30Mpa Air tight test pressure: 20Mpa
YSY-D014	Breathing Tank		Capacity: 12L Material: Aluminum alloy Weight: 15kg Wall thickness: 12.5mm Nominal working pressure: 20Mpa Hydraulic test pressure: 30Mpa Air tight test pressure: 20Mpa

YSY-D015	Gauge		Night-luminous Pressure gauge: 0 - 300/ 350bar Hose length: 80cm
YSY-D016	Gauge		Night-luminous Two in one Pressure gauge: 0 - 350bar Depth gauge: 0 - 70m Hose length: 80cm
YSY-D017	Gauge		Night-luminous Three in one Pressure gauge: 0 - 350bar Depth gauge: 0 - 70m Compass Hose length: 80cm
YSY-D018	1st Stage Regulator		Piston system Un-balanced type 3 low pressure ports 1 high pressure port Environmentally sealed Material: Copper with chromium plated
YSY-D019	1st Stage Regulator		Piston system Balanced type 4 low pressure ports 1 high pressure port Environmentally sealed Material: Titanium and copper with chromium plated

DONGTAI YOUNUS TRADING CO.,LTD.




YSY-D020	2nd Stage Regulator		Non-adjustable Color: Red Hose length: 67cm
YSY-D021	2nd Stage Regulator		Adjustable Color: Blue Hose length: 67cm
YSY-D022	Alternate Air Source		Volume: 2L Material: Carbon steel Color: Black Nominal working pressure: 20Mpa Hydraulic test pressure: 30Mpa Air tight test pressure: 20Mpa
YSY-D023	Weight Belt		Total weight: 10kg Material: Lead

YSY-D026	Mask		Maximum depth: 300m Air pressure: 6-14kg/ cm Flow rate of 500 L / min Dimensions (mm): 385*355*345 Weight: 12KG
YSY-D030	Diving Compass for Wrist		High sensitive oil-filled type compass Available angle of tilt: 20° Night luminous
YSY-D031	Mask Neoprene Strap		Material: neoprene Color: Blue, yellow, red, black
YSY-D032	BCD		Quick-release integrated weight system Two D-ring on shoulser, two plastic D-ring on bottom Pockets: 2 velcro flap pockets for accessories and 2 rear trim pockets for counterbalance the front weight Waist band: adjustable cummerbund ensure snug fit at any depth Shoulder strap: adjustable shoulder straps with 1.5" quick release buckles Three-in-one dump deflation system for enhanced buoyancy compensator in vary diving positions



YSY-D034	Diving Torch		Size: 184*58*39mm Power source: 18650/ 26650 battery*1 Weight: 375g Material: Aviation aluminum alloy Lamp bulb: CREE XML-T6 Luminance: 860 Gear: 5 Diving depth: 100m
YSY-D035	Head Torch		Power source: AAA battery*4/18650 battery*1 Weight: 158g Material: Aviation magnesium alloy and ABS Lamp bulb: CREE XML-T6 Luminance: 1000 Gear: 3 Diving depth: 30m
YSY-D040	Full Face Diving Mask		Full face mask, open-contained breathing apparatus, nose and mouth breathing for a broad vision / eye / mouth / nose are within the mask. The bottom left of the opening connecting the secondary pressure reducer, breathing gas out from this port.
YSY-D051	Diving Full Snorkel Mask		1) Material: polycarbonate, import medical liquid silicone 2) Color: black blue, pink 3) Features: Light weight, only 440 grams Soft, durable silicone skirt Comfortable, water-tight seal

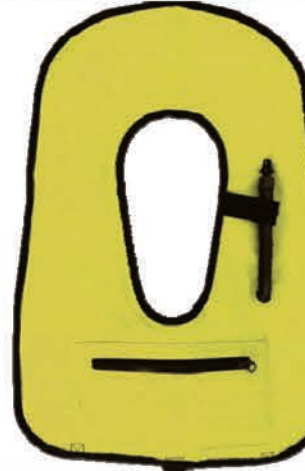YSY-D044	SNORKEL VEST		Material: 220-Denier Nylon Color: Yellow Harness: Waist And Crotch Strap With "Squeeze-Style" Quick-Release Buckles Oral Inflator: Yes Available in the Following Sizes: Large, Medium, Small Weight [with packaging] Small: 0.5 lb, Medium: 0.6 lb, Large: 0.95 lb
----------	--------------	---	--



MCH-6 EM STANDARD
220/230 /240V 50/60HZ



MCH-6 ET STANDARD
380/415/440V 50/60HZ

Working pressure:	Fire fighting: 300Bar 30Mpa 4300Psi	Diving: 225Bar 22.5Mpa 3300Psi
Charging rate :	100L/min 6m3/H 3.5CFM	80L/min 4.8m3/H 2.8CFM
Filling time cylinder:	6.8L 0-300bar/20.4min 12L 0-200bar/24min	6.8L 0-300bar/25.5min 12L 0-200bar/30min
Driven by :	Three-phase electric motor	Single-phase electric motor
Power :	3 Kw	2.2 Kw
Noise pressure :	83 dB/83	81.7 dB/81.7
Dry weight :	39Kg / 85 lbs	39.5 Kg / 87 lbs
Dimensions :	height 35cm, width 65cm, depth 39cm	height 35cm, width 65cm, depth 39cm